


The Over Bonnet Storage Locker



Model Number: JOBL2000

Product Summary

Made to Order in custom size and colour.

Spacious design capacity approximately 2 cubic meters.

Shelves are half cabinet width and are removable. Mountings are mid-height, on left and right side.

Designed to fit into most underground or basement car park spaces. Multiple units can be installed side by side, typically dictated by car park markings.

The OBL is made from folded panels fixed together with reinforcing braces. Panels are secured using stainless steel rivets.

The design can be supplied with an optional perforated top panel when used indoors under sprinkler systems.

A variety of door types are available – End Hinged, Top Hinged and Sliding. Doors slide in folded sheet metal channels on adjustable nylon rollers. Hinged Doors utilise Hardened Pin Hinges. Top Lift doors include gas lift struts.

Doors are fitted as standard with a Turn Handle with Key Operated Lock, connecting to steel lock rods. Security is assured as the lock rods engage into the locker body. Padlock versions are optional.

The Cabinets are easily relocatable if moving to a new location.

Visit our web site @ www.jaloc.co.nz

**THE SMART, SPACE-SAVING WAY TO KEEP BULKY ITEMS CLEAN, SECURE AND CLOSE-AT-HAND
MADE HERE IN NEW ZEALAND**

Jaloc Copyright 6-2022 we reserve the right to update our product specifications without notice

Design and Materials.

The Jaloc over bonnet locker is constructed from Electro-galvanised Sheet. Varied thicknesses for strategic components.

Manufactured in a clean New Zealand based factory environment using CAD and CNC technology.

Typical cabinet dimensions: Width 2300mm x Depth 700mm x 1000mm Height.

Strong adjustable bolt on legs designed to meet different basement height restraints and vehicle heights. Adjustable bolt locations give an overall height range from 2000mm to 2300mm.

Stainless steel rivets and Zinc Plated hardware.

Nylon Door Rollers. Hardened Steel Hinge Pins.

Surface finish is powder coating for appearance and durability. Dulux Duralloy colours by approved applicator are standard.

Optional levelling feet for uneven surfaces. Bolt down tabs for security & stability. Typically bolted to concrete pad with 4 x M10 x 60mm Sleeve Anchors.

Optional extras:

Galvanised only finish, Door Pull Handles, Bike Chain Loops, Cut Outs to fit around building services, Perforated top panel for fire sprinkler penetration, stainless steel construction, outdoor applications.

Extra or omitted shelving, Signage, Wall Mount Brackets.


Contact Jaloc for your Site Specific Specification.

Visit our web site @ www.jaloc.co.nz

**THE SMART, SPACE-SAVING WAY TO KEEP BULKY ITEMS CLEAN, SECURE AND CLOSE-AT-HAND
MADE HERE IN NEW ZEALAND**

Jaloc Copyright 6-2022 we reserve the right to update our product specifications without notice

JOBL2000 - The Over Bonnet Storage Locker

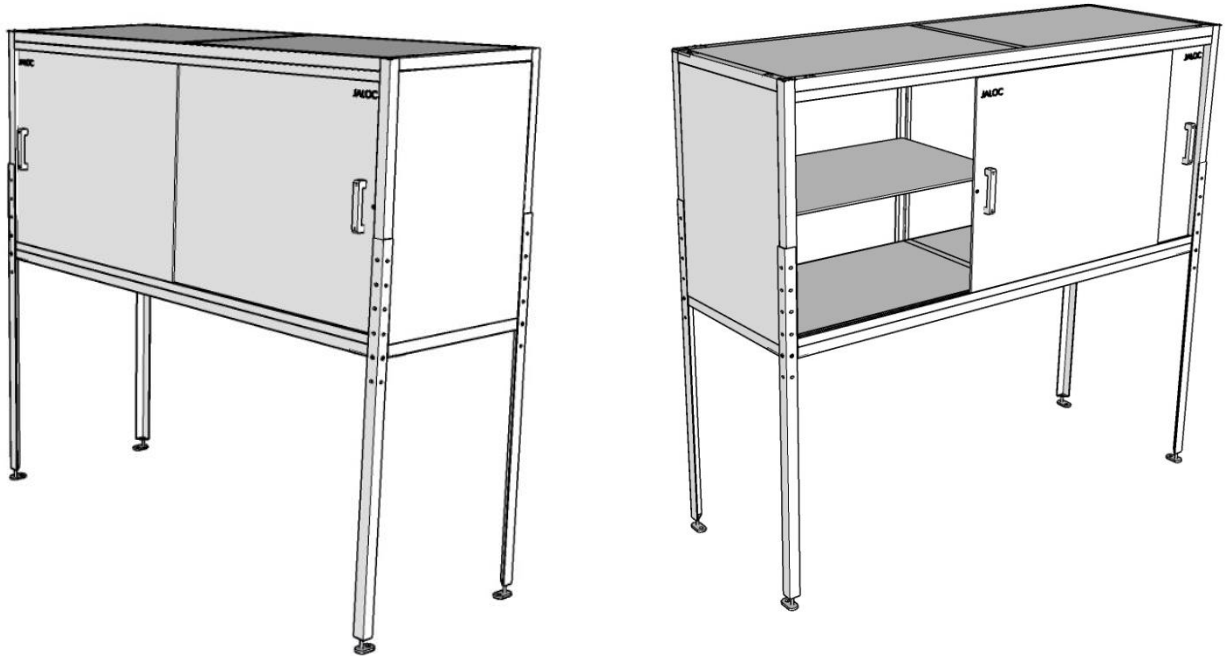

Functional Specs

- 2200mm Wide x 700mm Deep x 1000mm High
- Internal volume is 1.98 m^3
- Door openings 800mm High x 1000mm Wide ea.
- Custom made to order – dimensions can vary for site specific needs.

Visit our web site @ www.jaloc.co.nz

**THE SMART, SPACE-SAVING WAY TO KEEP BULKY ITEMS CLEAN, SECURE AND CLOSE-AT-HAND
MADE HERE IN NEW ZEALAND**

Jaloc Copyright 6-2022 we reserve the right to update our product specifications without notice



Example of Wall Mounted Sliding Door Unit



Example of Top Hinged Door Unit with Pipe Clearance Cut Out

Visit our web site @ www.jaloc.co.nz

**THE SMART, SPACE-SAVING WAY TO KEEP BULKY ITEMS CLEAN, SECURE AND CLOSE-AT-HAND
MADE HERE IN NEW ZEALAND**

Jaloc Copyright 6-2022 we reserve the right to update our product specifications without notice